



6AG5

6AG5

R-F AMPLIFIER PENTODE MINIATURE TYPE

Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Direct Interelectrode Capacitances (Approx.): ^o		
Grid to Plate	0.025 max.	μf
Input	6.5	μf
Output	1.8	μf
Maximum Overall Length		2-1/8"
Maximum Seated Height		1-7/8"
Length from Base Seat to Bulb Top (excluding tip)		1-1/2" ± 3/32"
Maximum Diameter		3/4"
Bulb		T-5-1/2
Base [▲]	Miniature Button 7-Pin	
Pin 1 - Grid		Pin 5 - Plate
Pin 2 - Cathode, Internal Shield, Grid No.3		Pin 6 - Screen
Pin 3 - Heater		Pin 7 - Cathode, Internal Shield, Grid No.3
Pin 4 - Heater		
RCA Socket		Stock No.9914
Mounting Position		Any



BOTTOM VIEW (7BD)

Maximum Ratings Are Design-Center Values

AMPLIFIER (Pentode Connection)

Plate Voltage	300 max. volts
Screen Voltage	150 max. volts
Plate Dissipation	2 max. watts
Screen Dissipation	0.5 max. watt
D-C Heater-Cathode Potential	100 max. volts

Typical Operation and Characteristics - Class A₁ Amplifier:

Plate	100	125	250	volts
Screen	100	125	150	volts
Cathode-Bias Resistor	100	100	200	ohms
Plate Res. (Approx.)	0.3	0.5	0.8	megohm
Transcond.	4750	5100	5000	μhos
Grid Bias for Plate				
Current = 10 μamp.	-5	-6	-8	volts
Plate Cur.	5.5	7.2	7	ma.
Screen Cur.	1.6	2.1	2	ma.

AMPLIFIER (Triode Connection)*

Plate Voltage	300 max. volts
Plate and Screen Dissipation (Total)	2.5 max. watts
D-C Heater-Cathode Potential	100 max. volts

Typical Operation and Characteristics - Class A₁ Amplifier:

Plate	180	250	volts
Cathode-Bias Resistor	350	825	ohms
Plate Res.	7900	11000	ohms
Amp. Factor	45	42	
Transcond.	5700	3800	μhos
Plate Cur.	7.0	5.5	ma.

o, *, ▲: See next page.

← Indicates a change.

Dec. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA

6AG5



6AG5

R-F AMPLIFIER PENTODE

- ° With no external shield.
- * Screen tied to plate.

NOTE: The 6AG5 may be used as an r-f amplifier at frequencies up to about 400 megacycles.

▲ The center hole in sockets designed for this base provides for the possibility that this tube type may be manufactured with the exhaust-tube tip at the base end. For this reason, it is recommended that in equipment employing this tube type, no material be permitted to obstruct the socket hole.

Dec. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA



6AG5

AVERAGE PLATE CHARACTERISTICS
PENTODE CONNECTION

6AG5

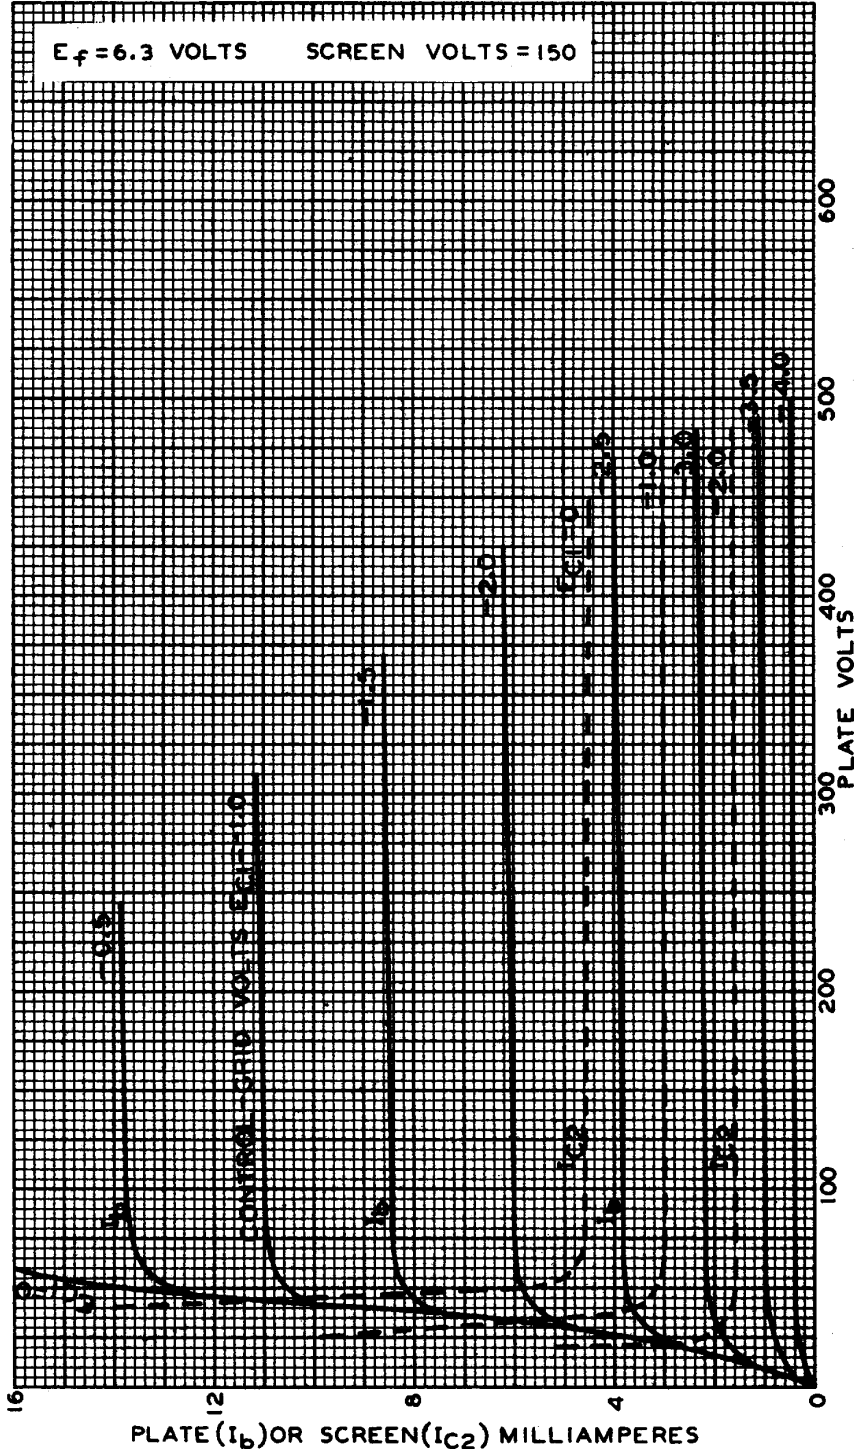

DEC. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA HARRISON, NEW JERSEY


92CM-6399 R1

6AG5



6AG5

AVERAGE PLATE CHARACTERISTICS
TRIODE CONNECTION

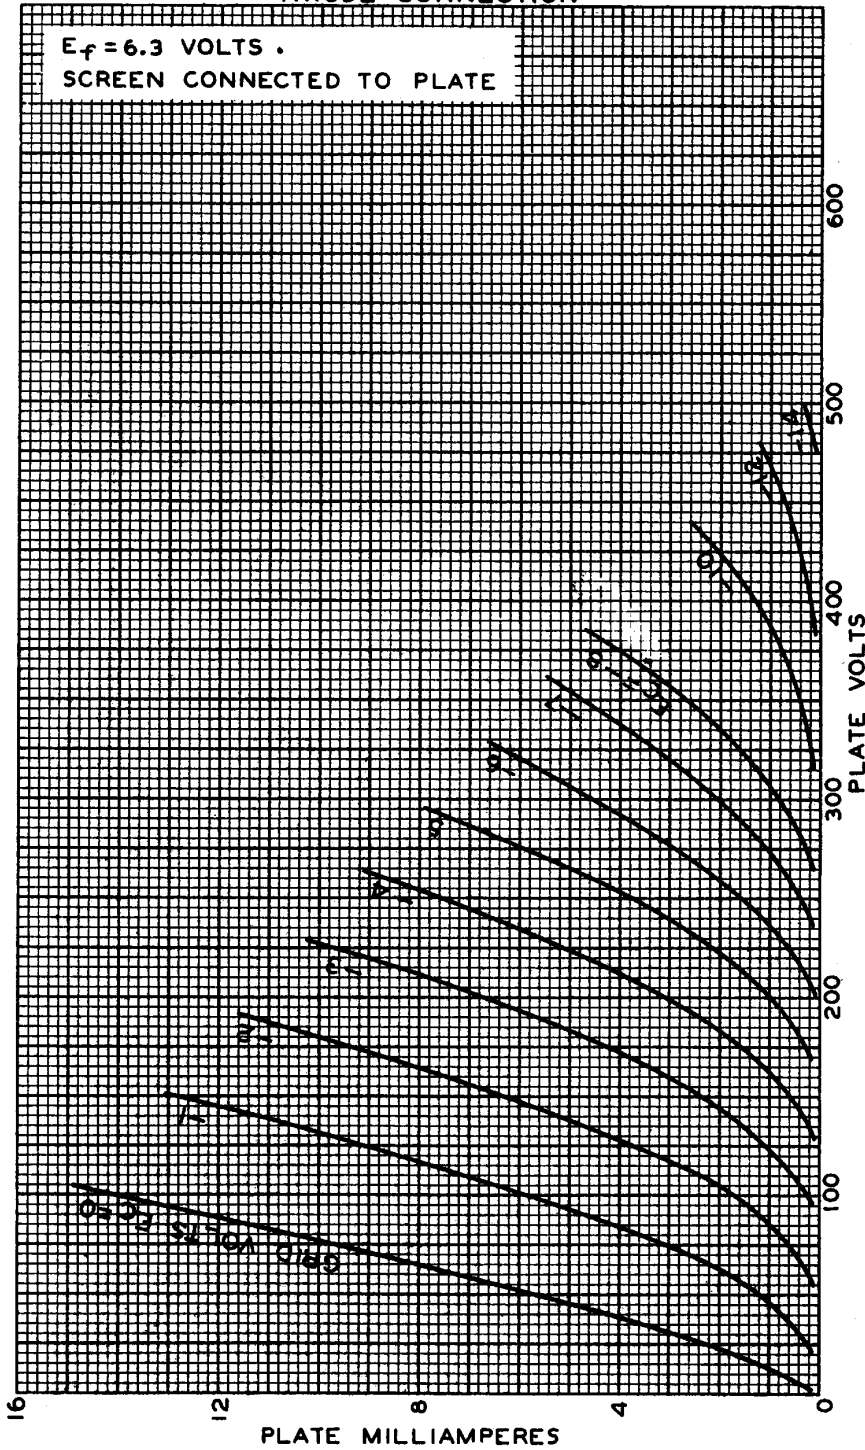

DEC. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA HARRISON, NEW JERSEY

92CM-6464