



6F6

10/64

6F6

# POWER PENTODE

METAL TYPE

## GENERAL DATA

### Electrical:

Heater, for Unipotential Cathode:

Voltage . . . . . 6.3 . . . . . ac or dc volts

Current . . . . . 0.7 . . . . . amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to plate. . . . . 0.26  $\mu$ f ←

Grid No.1 to cathode & grid No.3, grid No.2, shell, and heater . . . . . 6.5  $\mu$ f

Plate to cathode & grid No.3, grid No.2, shell, and heater . . . . . 13.5  $\mu$ f

### Mechanical:

Mounting Position . . . . . Any

Maximum Overall Length . . . . . 3-1/4"

Maximum Seated Length . . . . . 2-11/16"

Maximum Diameter . . . . . 1-5/16"


Dimensional Outline . . . . . See General Section

Bulb . . . . . Metal Shell MT8B ←

Base . . . . . Small-Wafer Octal 7-Pin (JETEC No.87-22) ←

Basing Designation for BOTTOM VIEW. . . . . 7S

- Pin 1 - Shell
- Pin 2 - Heater
- Pin 3 - Plate
- Pin 4 - Grid No.2



- Pin 5 - Grid No.1
- Pin 7 - Heater
- Pin 8 - Cathode, Grid No.3

### AF POWER AMPLIFIER - Class A<sub>1</sub>

### Maximum Ratings, Design-Center Values:

PLATE VOLTAGE . . . . . 375 max. volts

GRID-NO.2 (SCREEN-GRID) VOLTAGE . . . . . 285 max. volts

GRID-NO.2 INPUT . . . . . 3.75 max. watts

PLATE DISSIPATION . . . . . 11 max. watts ←

### PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . . . . . 90 max. volts ←

Heater positive with respect to cathode . . . . . 90 max. volts

### Typical Operation and Characteristics:

	Fixed Bias		Cathode Bias		
	250	285	250	285	
Plate Voltage . . . . .	250	285	250	285	volts
Grid-No.2 Voltage . . . . .	250	285	250	285	volts
Grid-No.1 (Control-Grid) Voltage . . . . .	-16.5	-20	-	-	volts
Cathode Resistor. . . . .	-	-	410	440	ohms
Peak AF Grid-No.1 Voltage . . . . .	16.5	20	16.5	20	volts
Zero-Signal Plate Current . . . . .	34	38	34	38	ma

← Indicates a change.

6F6



6F6

## POWER PENTODE

	Fixed Bias		Cathode Bias		
Max.-Signal Plate Current . . . . .	36	40	35	38	ma
Zero-Signal Grid-No.2 Current . . . . .	6.5	7	6.5	7	ma
Max.-Signal Grid-No.2 Current . . . . .	10.5	13	9.7	12	ma
Plate Resistance (Approx.) . . . . .	80000	78000	-	-	ohms
Transconductance . . . . .	2500	2550	-	-	μhos
Load Resistance . . . . .	7000	7000	7000	7000	ohms
Total Harmonic Distortion . . . . .	8	9	8.5	9	%
Max.-Signal Power Output . . . . .	3.2	4.8	3.1	4.5	watts
<b>Maximum Circuit Values:</b>					
Grid-No.1-Circuit Resistance:					
For fixed-bias operation . . . . .			0.1 max.		megohm
For cathode-bias operation . . . . .			0.5 max.		megohm
<b>AF POWER AMPLIFIER - Class A<sub>1</sub></b>					
<i>Triode Connection - Grid No.2 Connected to Plate</i>					
<b>Maximum Ratings, Design-Center Values:</b>					
PLATE VOLTAGE . . . . .			350 max.		volts
PLATE DISSIPATION . . . . .			10 max.		watts
PEAK HEATER-CATHODE VOLTAGE:					
Heater negative with respect to cathode . . . . .			90 max.		volts
Heater positive with respect to cathode . . . . .			90 max.		volts
<b>Typical Operation and Characteristics:</b>					
	Fixed Bias		Cathode Bias		
Plate Voltage . . . . .	250		250		volts
Grid-No.1 (Control-Grid) Voltage . . . . .	-20		-		volts
Cathode Resistor . . . . .	-		650		ohms
Peak AF Grid-No.1 Voltage . . . . .	20		20		volts
Zero-Signal Plate Current . . . . .	31		31		ma
Max.-Signal Plate Current . . . . .	34		32		ma
Amplification Factor . . . . .	6.8		-		
Plate Resistance (Approx.) . . . . .	2600		-		ohms
Transconductance . . . . .	2600		-		μhos
Load Resistance . . . . .	4000		4000		ohms
Total Harmonic Distortion . . . . .	6.5		6.5		%
Max.-Signal Power Output . . . . .	0.85		0.8		watt
<b>Maximum Circuit Values:</b>					
Grid-No.1-Circuit Resistance:					
For fixed-bias operation . . . . .			0.1 max.		megohm
For cathode-bias operation . . . . .			0.5 max.		megohm

→ Indicates a change.

12-56

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6F6

*obsolete*  
*10/64*

6F6

### POWER PENTODE

#### PUSH-PULL AF POWER AMPLIFIER - Class A<sub>1</sub>

**Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE. . . . .	375 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . .	285 max.	volts
GRID-No.2 INPUT. . . . .	3.75 max.	watts
PLATE DISSIPATION. . . . .	11 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	90 max.	volts
Heater positive with respect to cathode.	90 max.	volts

**Typical Operation:**

*Values are for 2 tubes*

*Fixed Bias    Cathode Bias*

Plate Voltage. . . . .	315	315	volts
Grid-No.2 Voltage. . . . .	285	285	volts
Grid-No.1 Voltage. . . . .	-24	-	volts
Cathode Resistor . . . . .	-	320	ohms
Peak AF Grid-No.1-to-			
Grid-No.1 Voltage. . . . .	48	58	volts
Zero-Signal Plate Current.	62	62	ma
Max.-Signal Plate Current.	80	73	ma
Zero-Signal Grid-No.2			
Current. . . . .	12	12	ma
Max.-Signal Grid-No.2			
Current. . . . .	19.5	18	ma
Effective Load Resistance			
(Plate to plate) . . . . .	10000	10000	ohms
Total Harmonic Distortion.	4	3	%
Max.-Signal Power Output .	11	10.5	watts

**Maximum Circuit Values:**

Grid-No.1-Circuit Resistance:			
For fixed-bias operation . . . . .		0.1 max.	megohm
For cathode-bias operation . . . . .		0.5 max.	megohm

#### PUSH-PULL AF POWER AMPLIFIER - Class AB<sub>2</sub>

**Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE. . . . .	375 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . .	285 max.	volts
GRID-No.2 INPUT. . . . .	3.75 max.	watts
PLATE DISSIPATION. . . . .	11 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	90 max.	volts
Heater positive with respect to cathode.	90 max.	volts

**Typical Operation:**

*Values are for 2 tubes*

*Fixed Bias    Cathode Bias*

Plate Voltage. . . . .	375	375	volts
------------------------	-----	-----	-------

← Indicates a change.

6F6



6F6

## POWER PENTODE

	<i>Fixed Bias</i>	<i>Cathode Bias</i>	
Grid-No.2 Voltage. . . . .	250	250	volts
Grid-No.1 Voltage. . . . .	-26	-	volts
Cathode Resistor . . . . .	-	340	ohms
Peak AF Grid-No.1-to-			
Grid-No.1 Voltage. . . . .	82	94	volts
Zero-Signal Plate Current. . .	34	54	ma
Max.-Signal Plate Current. . .	82	77	ma
Zero-Signal Grid-No.2			
Current. . . . .	5	8	ma
Max.-Signal Grid-No.2			
Current. . . . .	19.5	18	ma
Effective Load Resistance			
(Plate to plate) . . . . .	10000	10000	ohms
Total Harmonic Distortion. . .	3.5	5	%
Max.-Signal Power Output . . .	18.5	19	watts
<b>Maximum Circuit Values:</b>			
Grid-No.1-Circuit Resistance:			
For fixed-bias operation . . . . .		0.1 max.	megohm
For cathode-bias operation . . . . .		0.5 max.	megohm
<b>PUSH-PULL AF POWER AMPLIFIER - Class AB<sub>2</sub></b>			
<i>Triode Connection - Grid No.2 Connected to Plate</i>			
<b>Maximum Ratings, Design-Center Values:</b>			
PLATE VOLTAGE. . . . .	350 max.		volts
PLATE DISSIPATION. . . . .	10 max.		watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode. . . . .	90 max.		volts
Heater positive with respect to cathode. . . . .	90 max.		volts
<b>Typical Operation:</b>			
<i>Values are for 2 tubes</i>			
	<i>Fixed Bias</i>	<i>Cathode Bias</i>	
Plate Voltage. . . . .	350	350	volts
Grid-No.1 (Control-Grid)			
Voltage. . . . .	-38	-	volts
Cathode Resistor . . . . .	-	730	ohms
Peak AF Grid-No.1-to-			
Grid-No.1 Voltage. . . . .	123	132	volts
Zero-Signal Plate Current. . .	48	50	ma
Max.-Signal Plate Current. . .	92	60	ma
Effective Load Resistance			
(Plate to plate) . . . . .	6000	10000	ohms
Total Harmonic Distortion. . .	2	3	%
Max.-Signal Power Output . . .	13	9	watts
<b>Maximum Circuit Values:</b>			
Grid-No.1-Circuit Resistance:			
For fixed-bias operation . . . . .		0.1 max.	megohm
For cathode-bias operation . . . . .		0.5 max.	megohm

→ Indicates a change.




6F6

*Archie  
10/64*

6F6

### AVERAGE CHARACTERISTICS PENTODE CONNECTION

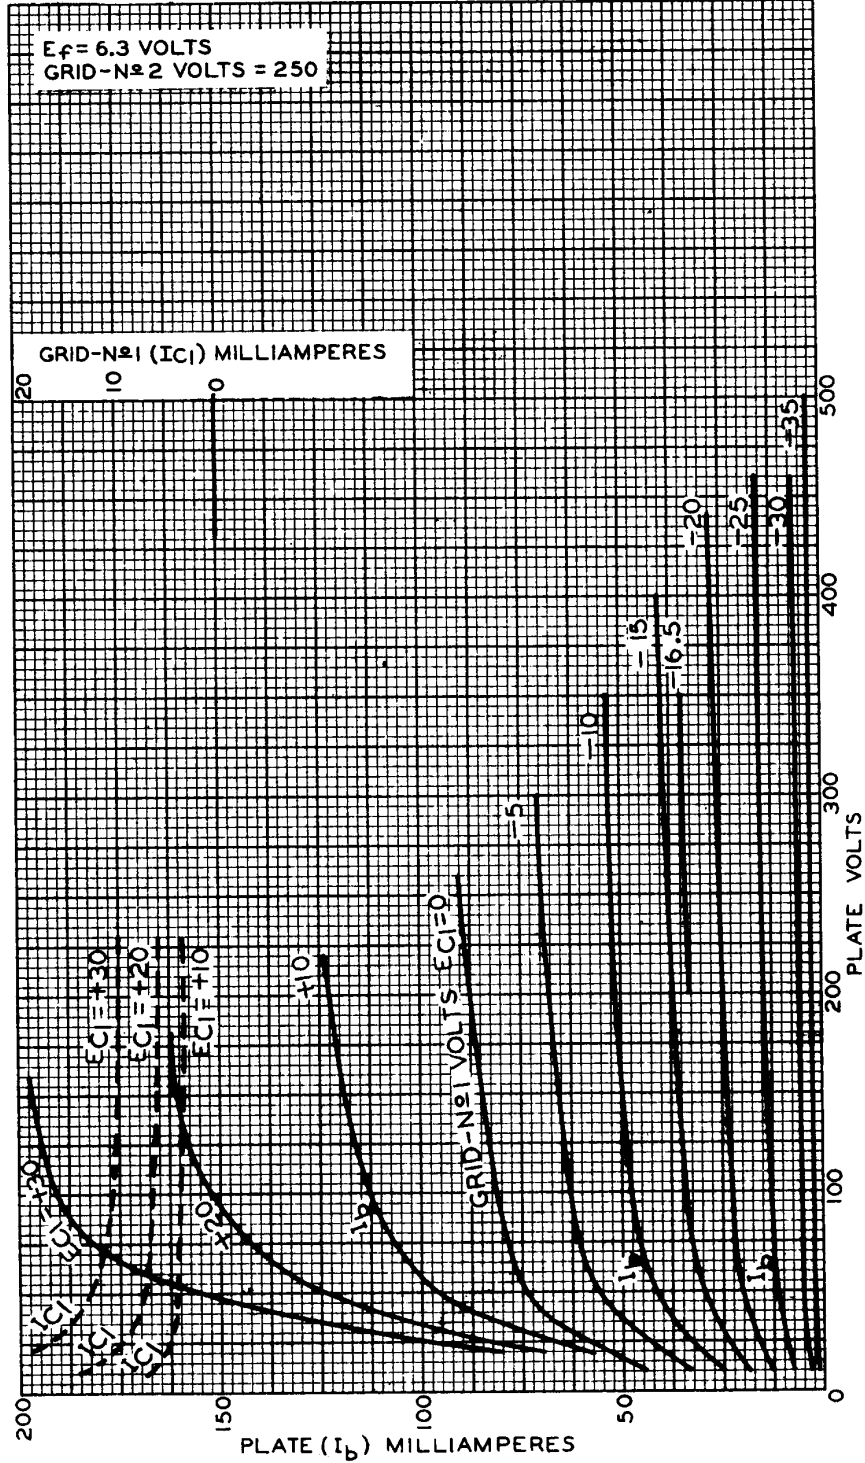

TUBE DIVISION  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-4431R1

6F6



6F6

### AVERAGE CHARACTERISTICS TRIODE CONNECTION

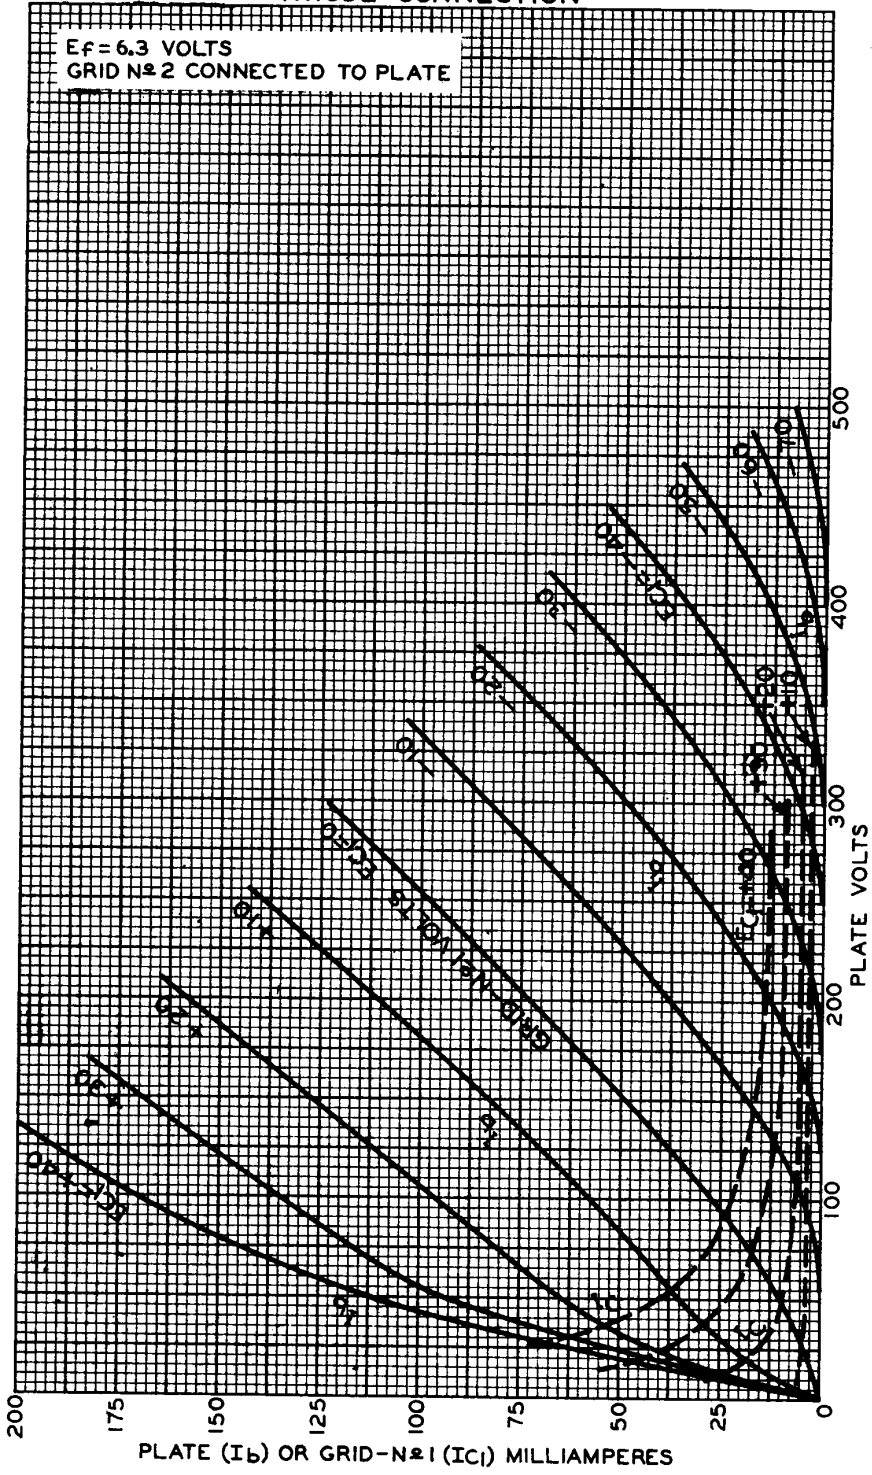


PLATE (I<sub>b</sub>) OR GRID-N-1 (I<sub>c</sub>) MILLIAMPERES

TUBE DIVISION

92CM-4440R1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



*Approved  
10/64*

6F6

**OPERATION CHARACTERISTICS  
PENTODE CONNECTION—CLASS AB<sub>2</sub> OPERATION**

$E_p = 6.3$  VOLTS

INPUT STAGE: CLASS A<sub>1</sub> DRIVER—ONE TYPE 6F6 AS TRIODE.

PLATE-SUPPLY VOLTS=250

CATHODE RESISTOR (OHMS)=650

OUTPUT STAGE: CLASS AB<sub>2</sub>—TWO TYPE 6F6'S AS PENTODES.

ZERO-SIGNAL PLATE VOLTS=375 FROM SOURCE HAVING  
RESISTANCE ( $R_b$ ) SHOWN IN TABLE.

ZERO-SIGNAL GRID-N<sub>2</sub> VOLTS=250 FROM THE ABOVE  
375-VOLT PLATE SUPPLY THROUGH RESISTANCE ( $R_b$ )  
SHOWN IN TABLE.

ZERO-SIGNAL BIAS VOLTS=VALUE FROM GRID RESISTOR  
( $R_c$ ) OF 340 OHMS.

EFFECTIVE LOAD RESISTANCE (PLATE TO PLATE)=10000 OHMS

CONDI- TION	CURVE	$R_b$ Ohms	$R_d$ Ohms	DRIVER STAGE		INTERSTAGE TRANSFORMER	
				Input-Sig. Volts* (RMS)	Plate Load Ohms	Voltage Ratio Prim.:1/2Sec.	Peak Power Efficiency Per Cent
1	—	0	0	14.6	51100	2.50:1	47.7
2	- - -	1000	2000	10.3	33100	1.74:1	64.4

\* For maximum output.

