



8013-A

8013-A

HALF-WAVE VACUUM RECTIFIER

GENERAL DATA

Electrical:


Filament, Thoriated Tungsten:

	Min.	Av.	Max.	
Voltage	2.37	2.50	2.63	ac volts
Current at 2.50 volts	4.7	5.0	5.3	amp

Mechanical:

- Mounting Position . . Any, preferably vertical with base down
- Maximum Overall Length 6-1/16"
- Seated Length 5-9/32" ± 5/32"
- Maximum Diameter 2-1/16"
- Weight (Approx.) 2.9 oz
- Bulb ST-16
- Cap Skirted Medium with Rolled Edge (JETEC No. C1-19)
- Base Medium-Shell Small 4-Pin (JETEC No. A4-9)
- Basing Designation for BOTTOM VIEW 4P

- Pin 1 - Filament
- Pin 2 - No Connection
- Pin 3 - No Connection



- Pin 4 - Filament
- Cap - Plate

HALF-WAVE RECTIFIER

Maximum Ratings, Absolute Values:

PEAK PLATE VOLTAGE:			
Forward	40000 [▲]	max.	volts
Inverse	40000 [▲]	max.	volts
PLATE CURRENT:			
Peak	150	max.	ma
Average	20	max.	ma
Fault	500	max.	ma
PLATE DISSIPATION	12	max.	watts

OPERATING CONSIDERATIONS

Filament and plate voltage may be applied simultaneously to the 8013-A.

The bulb of the 8013-A should be cleaned regularly. Accumulation of dust or other foreign matter on the bulb will cause leakage and, as a result, probably tube failure.

X-rays are produced during normal operation of the 8013-A. These rays can constitute a health hazard unless the tube is adequately shielded for X-ray radiation. Although relatively simple shielding should prove adequate, make sure it provides the required protection to the operator.

[▲]This value may be increased to 55000 volts when the 8013-A is immersed in oil.

← Indicates a change.

SEPT. 1, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA

8013-A



8013-A

HALF-WAVE VACUUM RECTIFIER

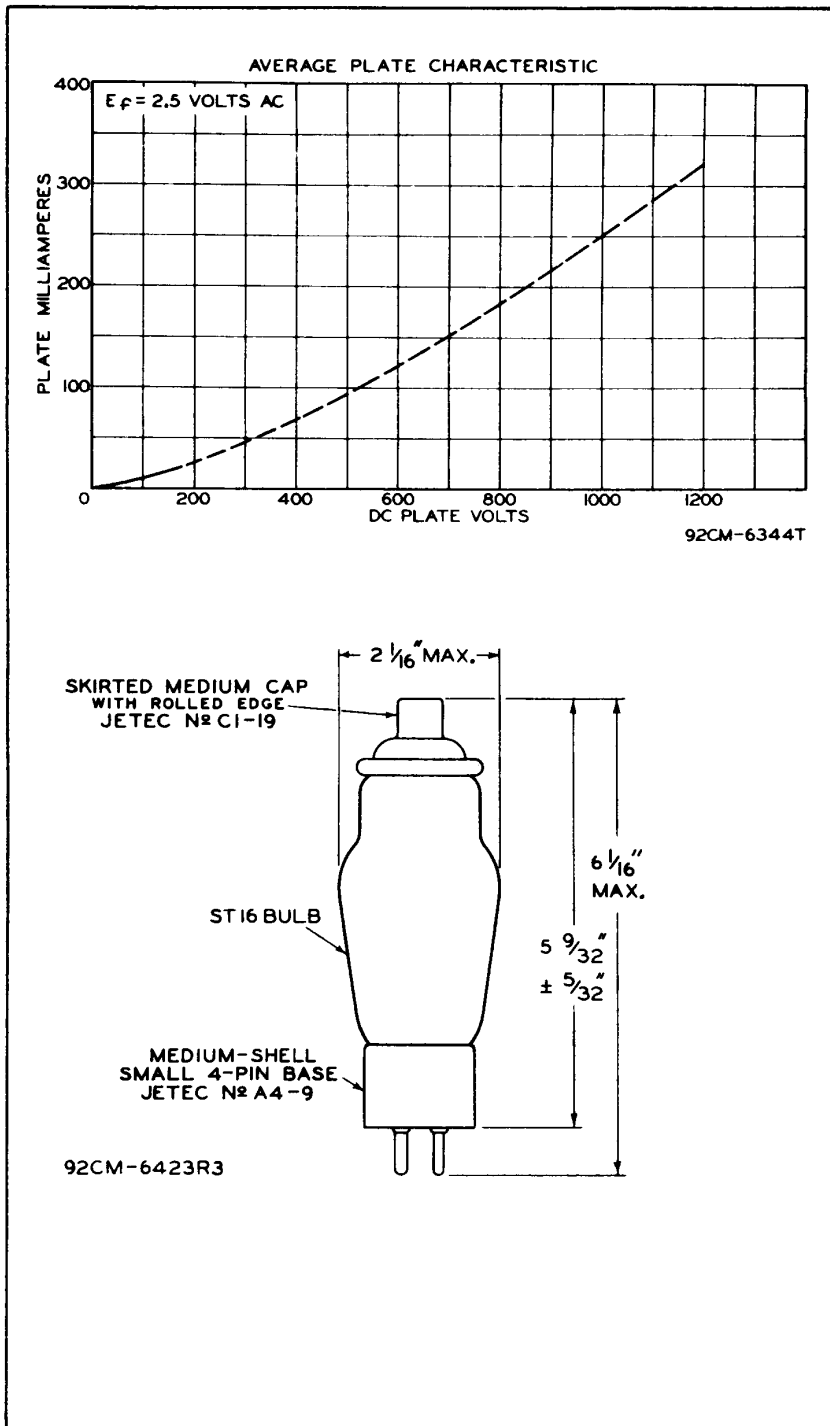

SEPT. 1, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6344T
-6423R3