

## Power Triode

### VHF GRID-DRIVE OR CATHODE-DRIVE OPERATION

INTEGRAL RADIATOR	4000 WATTS CW OUTPUT AT 220 Mc/s
FORCED-AIR COOLED	7000 WATTS CW OUTPUT AT 30 Mc/s
THORIATED-TUNGSTEN	6350 WATTS VHF TV OUTPUT
FILAMENT	AT 216 Mc/s

For Use In VHF Television and CW Service in  
Stationary and Portable Equipment

### ELECTRICAL


#### Filamentary Cathode, Thoriated-Tungsten Type<sup>g</sup>

Voltage (AC or DC) . . . . .	{ 12.6 typ V	V
	{ 13.2 max V	V
Current:		
Typical value at 12.6 volts. . . . .	29	A
For starting, even momentarily . . . . .	175 max	A
Cold Resistance. . . . .	0.052	$\Omega$
Heating Time . . . . .	15 min	s
Amplification Factor . . . . .	29	
Direct Interelectrode Capacitances		
Grid to plate. . . . .	18	pF
Grid to filament . . . . .	19	pF
Plate to filament. . . . .	0.5	pF

### MECHANICAL

Operating Position . . . . .	Vertical, either end up
Maximum Overall Length . . . . .	7.12 in
Maximum Diameter (See <i>Dimensional Outline</i> ) . . . . .	4.68 in
Weight (Approx.) . . . . .	6-1/4 lbs
Radiator . . . . .	Integral part of tube
Terminal Connections (See <i>Dimensional Outline</i> )	

- F - Filament
- F<sub>M</sub> - Filament  
    Mid-Tap
- G - Grid Terminal  
    (Flange)
- P - Plate Terminal  
    (Radiator)



### THERMAL

#### Air Flow<sup>h</sup>

**Through Radiator**—Adequate air flow to limit the plate-core temperature to 180° C should be delivered by a blower through the radiator before and during the application of all voltages. The flow of incoming air at temperatures up to 45° C are given for various plate dissipations indicated in the following tabulation:



# 5762/7C24

Percentage of maximum rated  
plate dissipation for each class  
of service. . . . .

	100	80	60	per cent
→ Minimum air flow . . . . .	300	214	125	cfm
→ Static pressure . . . . .	2.9	1.47	0.58	in. of water

To grid and filament terminals . . . . . 10 min. cfm

The specified air flow from a 1"-diameter nozzle should be directed into the filament header before and during the application of any voltages in order to limit the temperature of the filament and grid terminals to the specified maximum value.

During standby operation—Cooling air is required when heater voltage is applied to the tube.

Terminal Temperature (Filament, grid, and plate) . . . . .	180 max	°C
Plate Core Temperature (See <i>Dimensional Outline</i> )	180 max	°C
Bulb Temperature (At hottest part) . . . . .	180 max	°C

## AF POWER AMPLIFIER & MODULATOR — CLASS B<sup>j</sup>

Maximum CCS Ratings, Absolute-Maximum Values

DC Plate Voltage . . . . .	6200	V
Max.-Signal DC Plate Current . . . . .	1.5	A
Max.-Signal Plate Input . . . . .	8700	W
→ Plate Dissipation . . . . .	4000	W

### Typical Operation

Values are for 2 tubes

DC Plate Voltage . . . . .	4700	V
DC Grid Voltage . . . . .	-200	V
Peak AF Grid-to-Grid Voltage . . . . .	900	V
Zero-Signal DC Plate Current . . . . .	0.3	A
Max.-Signal DC Plate Current . . . . .	2.8	A
Effective Load Resistance (Plate to plate) . . . . .	3640	Ω
Max.-Signal Driving Power (Approx.) . . . . .	195	W
Max.-Signal Power Output (Approx.) . . . . .	8800	W

## RF POWER AMPLIFIER — CLASS B TELEVISION SERVICE<sup>j</sup>

Synchronizing-level conditions per tube unless otherwise specified at frequency of 54 to 216 Mc/s

Maximum CCS Ratings, Absolute-Maximum Values

DC Plate Voltage . . . . .	4500	V
DC Plate Current . . . . .	2	A
DC Grid Current (Pedestal level) . . . . .	0.325	A
Plate Input . . . . .	9000	W
Plate Dissipation . . . . .	4000	W

### Typical Operation in Cathode-Drive Circuit

	Bandwidth of			
	10	8.5	6	Mc/s
DC Plate Voltage . . . . .	3000	3200	4300	V
DC Grid Voltage . . . . .	-105	-110	-150	V
Peak RF Grid Voltage				
Synchronizing level . . . . .	380	435	500	V
Pedestal level . . . . .	290	310	355	V

→ Indicates a change.



	Bandwidth of			
	10	8.5	6.0	Mc/s
<b>DC Plate Current</b>				
Synchronizing level . . . . .	1.8	1.8	2	A
Pedestal level . . . . .	1.36	1.35	1.5	A
<b>DC Grid Current</b>				
Synchronizing level . . . . .	0.265	0.400	0.439	A
Pedestal level . . . . .	0.115	0.130	0.118	A
<b>Driving Power (Approx.)</b>				
Synchronizing level . . . . .	625	770	983	W
<b>Power Output (Approx.)</b>				
Synchronizing level . . . . .	3150	4000	6350	W
Pedestal level . . . . .	1800	2300	3590	W

**GRID-MODULATED RF POWER AMPLIFIER<sup>j</sup>  
CLASS C TELEVISION SERVICE**

*Synchronizing-level conditions per tube unless  
otherwise specified. At frequency of 54 to 216 Mc/s*

**Maximum CCS Ratings, Absolute-Maximum Values**

DC Plate Voltage . . . . .	3700	V
DC Grid Voltage (White level) . . . . .	-800	V
DC Plate Current . . . . .	1.9	A
DC Grid Current (Pedestal level) . . . . .	0.225	A
Plate Input . . . . .	6500	W
Plate Dissipation . . . . .	4000	W ←

**Typical Operation in Cathode-Drive Circuit**

	Bandwidth of		
	8.5		Mc/s
DC Plate Voltage . . . . .	3200		V
<b>DC Grid Voltage</b>			
Synchronizing level . . . . .	-110		V
Pedestal level . . . . .	-220		V
White level . . . . .	-520		V
Peak RF Grid Voltage . . . . .	435		V
<b>DC Plate Current</b>			
Synchronizing level . . . . .	1.8		A
Pedestal level . . . . .	1.25		A
<b>DC Grid Current (Approx.)</b>			
Synchronizing level . . . . .	0.400		A
Pedestal level . . . . .	0.130		A
<b>Driving Power (Approx.)</b>			
Synchronizing level . . . . .	770		W
<b>Power Output (Approx.)</b>			
Synchronizing level . . . . .	4000		W
Pedestal level . . . . .	2300		W

**PLATE-MODULATED RF POWER AMPLIFIER — CLASS C TELEPHONY<sup>j</sup>**

*Carrier conditions per tube for use with a  
maximum modulation factor of 1*

**Maximum CCS Ratings, Absolute-Maximum Values**

DC Plate Voltage . . . . .	5000	V
DC Grid Voltage . . . . .	-1000	V
DC Plate Current . . . . .	1	A
DC Grid Current . . . . .	0.3	A
Plate Input . . . . .	5000	W
Plate Dissipation . . . . .	2700	W ←



## Typical Operation in Grid-Drive Circuit

	Up to 30 Mc/s	At 110 Mc/s	
DC Plate Voltage . . . . .	4700	4000	V
DC Grid Voltage . . . . .	-400	-350	V
From a grid resistor of . . . . .	1425	1460	$\Omega$
Peak RF Grid Voltage <sup>a</sup> . . . . .	675	600	V
DC Plate Current . . . . .	0.96	0.93	A
DC Grid Current (Approx.). . . . .	0.28	0.24	A
Driving Power (Approx.). . . . .	170	130	W
Power Output (Approx.) . . . . .	3700	2800	W

## Typical Operation in Cathode-Drive Circuit

	Up to 30 Mc/s	At 110 Mc/s	
DC Plate Voltage . . . . .	4700	4000	V
DC Grid Voltage . . . . .	-400	-350	V
From a grid resistor of . . . . .	1425	1460	$\Omega$
Peak RF Grid Voltage . . . . .	675	600	V
DC Plate Current . . . . .	0.96	0.93	A
DC Grid Current (Approx.). . . . .	0.28	0.24	A
Driving Power (Approx.) <sup>b</sup> . . . . .	720	600	W
Power Output (Approx.) . . . . .	4200	3200	W

RF POWER AMPLIFIER & OSCILLATOR — CLASS C TELEGRAPHY<sup>j</sup>  
AND

## RF POWER AMPLIFIER — CLASS C FM TELEPHONY

## Maximum CCS Ratings, Absolute-Maximum Values

DC Plate Voltage . . . . .	6200	V
DC Grid Voltage . . . . .	-1000	V
DC Plate Current . . . . .	1.4	A
DC Grid Current . . . . .	0.3	A
Plate Input . . . . .	8700	W
→ Plate Dissipation . . . . .	4000	W

## Typical Operation in Grid-Drive Circuit

	Up to 30 Mc/s	
DC Plate Voltage . . . . .	6000	V
DC Grid Voltage		
From a fixed supply of . . . . .	-550	V
From a grid resistor of . . . . .	1900	$\Omega$
From a cathode resistor of . . . . .	360	$\Omega$
Peak RF Grid Voltage . . . . .	875	V
DC Plate Current . . . . .	1.25	A
DC Grid Current (Approx.). . . . .	0.290	A
Driving Power (Approx.). . . . .	225	W
Power Output (Approx.) . . . . .	6000	W

## Typical Operation in Cathode-Drive Circuit

	Up to 30 Mc/s	At 110 Mc/s	At 220 Mc/s	
DC Plate Voltage . . . . .	6000	5000	4300	V

→ Indicates a change.



	Up to 30 Mc/s	At 110 Mc/s	At 220 Mc/s	
<b>DC Grid Voltage</b>				
From a fixed supply of . . .	-550	-1000	-200	V
From a grid resistor of . . .	1900	4100	807	$\Omega$
From a cathode resistor of . . .	360	740	134	$\Omega$
Peak RF Grid Voltage . . . . .	875	1350	432	V
DC Plate Current . . . . .	1.25	1.1	1.25	A
DC Grid Current (Approx.) . . .	0.290	0.245	0.25	A
Driving Power (Approx.) . . . .	1225	1680	542	W
Power Output (Approx.) . . . . .	7000	5500	4000	W

### SELF-RECTIFYING OSCILLATOR OR AMPLIFIER — CLASS C<sup>j</sup>

Maximum CCS Ratings, Absolute-Maximum Values

AC Plate Voltage (RMS) . . . . .	7000	V
DC Grid Voltage . . . . .	-300	V
DC Plate Current . . . . .	0.635	A
DC Grid Current . . . . .	0.135	A
Plate Input <sup>c</sup> . . . . .	4900	W
Plate Dissipation . . . . .	4000	W ←

#### Typical Operation

AC Plate Voltage (RMS) . . . . .	6600	V
DC Grid Voltage . . . . .	-127	V
DC Plate Current . . . . .	0.625	A
DC Grid Current (Approx.) . . . .	0.105	A
Driving Power (Approx.) <sup>d</sup> . . . . .	60	W
Power Output (Approx.) . . . . .	3350	W

### AMPLIFIER OR OSCILLATOR — CLASS C<sup>j</sup>

With separate, rectified, unfiltered,  
single-phase, full-wave plate supply

Maximum CCS Ratings, Absolute-Maximum Values

DC Plate Voltage . . . . .	5600	V
DC Grid Voltage . . . . .	-600	V
DC Plate Current . . . . .	1.25	A
DC Grid Current . . . . .	0.270	A
Plate Input <sup>e</sup> . . . . .	8600	W
Plate Dissipation . . . . .	4000	W ←

#### Typical Operation

DC Plate Voltage . . . . .	5000	V
DC Grid Voltage . . . . .	-260	V
DC Plate Current . . . . .	1.2	A
DC Grid Current (Approx.) . . . .	0.260	A
Driving Power (Approx.) <sup>f</sup> . . . . .	150	W
Power Output (Approx.) . . . . .	5650	W

<sup>a</sup> Driver modulated approximately 30%.

<sup>b</sup> Carrier power of driver modulated 100%.

<sup>c</sup> Plate input is 1.11 times the product of the ac voltage (rms) and the dc plate current.

<sup>d</sup> From a self-rectified driver.

← Indicates a change.



<sup>e</sup> Plate input is 1.23 times the product of the dc plate voltage and the dc plate current.

<sup>f</sup> From a driver with a rectified, unfiltered, single-phase, full-wave plate supply.

The following footnotes apply to the *RCA Transmitting Tube Operating Considerations* given at front of this section.

<sup>g</sup> See Electrical Considerations-Filament or Heater.

<sup>h</sup> See Cooling Considerations-Forced-Air Cooling.

<sup>j</sup> See Classes of Service.

## RATINGS VS FREQUENCY

FREQUENCY	30	110	220	Mc/s	
<b>Maximum Permissible Percentage of Maximum Rated Plate Voltage and Plate Input</b>					
Class B Television Service	Full Ratings—54 to 216 Mc/s				
Class C Television Service	Full Ratings—54 to 216 Mc/s				
Class C Telephony, Plate-Modulated	100	84	72	%	
Class C Telegraphy and FM Telephony	100	84	72	%	
Class C Amplifier or Oscillator, Self-Rectifying	100	84	72	%	
Class C Amplifier or Oscillator with Separate, Rectified, Unfiltered Plate Supply	100	84	72	%	
<b>Maximum Permissible Percentage of Maximum Rated DC Grid Voltage and DC Grid Current</b>					
Class B Television Service	Full Ratings—54 to 216 Mc/s				
Class C Television Service	Full Ratings—54 to 216 Mc/s				
			<i>Volt.</i>	<i>Cur.</i>	
Class C Telephony, Plate-Modulated	100	100	60	83	%
Class C Telegraphy and FM Telephony	100	100	60	83	%
Class C Amplifier or Oscillator, Self-Rectifying	100	100	60	83	%
Class C Amplifier or Oscillator with Separate, Rectified, Unfiltered Plate Supply	100	100	60	83	%


## CHARACTERISTICS RANGE VALUES

	Note	Min	Max	
Filament Current . . . . .	1	27	31	A
Amplification Factor . . . . .	1,2	25	33	
<b>Direct Interelectrode Capacitances</b>				
Grid to plate. . . . .	-	16.5	20.5	pF
Grid to filament . . . . .	-	15.5	22.5	pF
Plate to filament. . . . .	-	0.38	0.62	pF


→ Indicates a change.



## Typical Cooling Characteristics

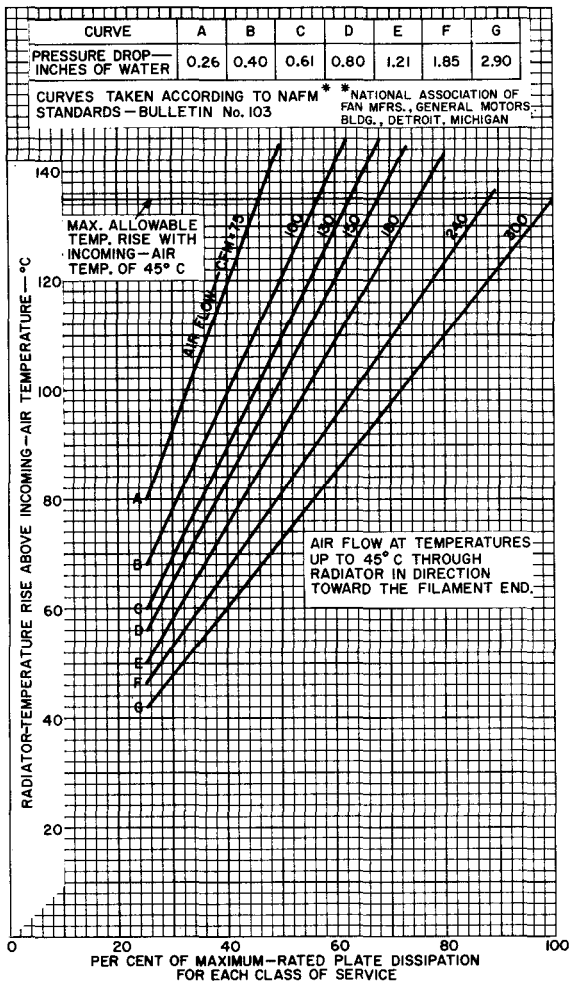

## Typical Constant-Current Characteristics

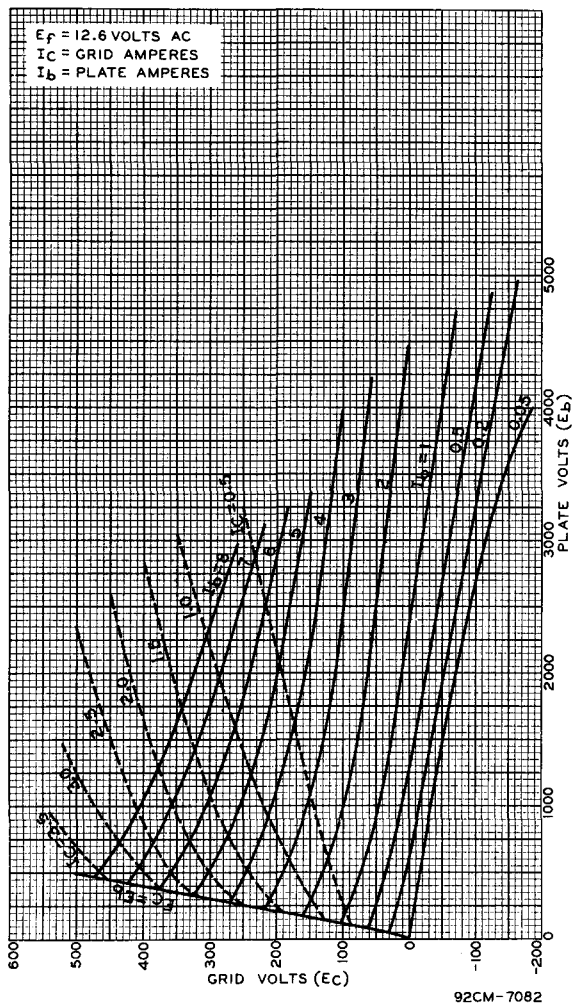



	<i>Note</i>	<i>Min</i>	<i>Max</i>	
Grid Voltage . . . . .	1,3	-125	-190	V
Plate Voltage. . . . .	1,4	1350	1750	V
Plate Voltage. . . . .	1,5	2600	3400	V
Useful Power Output. . . . .	1,6	3	-	kW

**Note 1:** With 12.6 volts rms on filament.

**Note 2:** With dc grid voltage of -25 volts measured from center-tap of filament supply, and dc plate voltage adjusted to give dc plate current of 0.5 ampere.

**Note 3:** With dc plate voltage of 4000 volts, and dc grid voltage adjusted to give dc plate current of 0.05 ampere.


**Note 4:** With dc grid voltage of 0 volts measured from center-tap of filament supply, and dc plate voltage adjusted to give dc plate current of 0.5 ampere.

**Note 5:** With dc grid voltage of -50 volts measured from center-tap of filament supply, and dc plate voltage adjusted to give dc plate current of 0.5 ampere.

**Note 6:** In a self-excited, coaxial, oscillator circuit and with dc plate voltage of 5000 volts, dc plate current of 1.1 amperes, grid resistor of  $1500 \pm 10\%$  ohms, dc grid current of 0.250 to 0.300 ampere, and frequency of 110 Mc/s.



## DIMENSIONAL OUTLINE

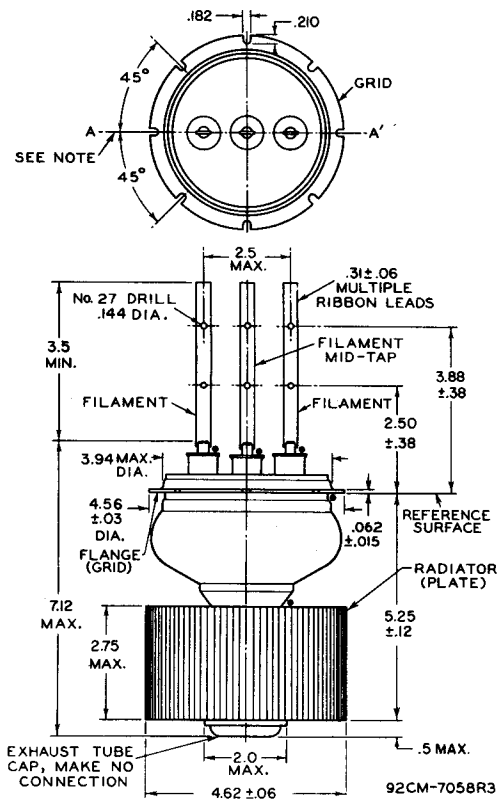

DIMENSIONS IN INCHES

• Temperature Measurement Point.

Note: Plane of filament leads will not deviate more than 3-1/2° from plane passing through AA' normal to grid flange.

