



6AS7-G

6AS7-G

LOW-MU TWIN POWER TRIODE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage. . . . . 6.3 . . . . . ac or dc volts
Current. . . . . 2.5 . . . . . amp

Direct Interelectrode Capacitances (Approx., each unit):°

Grid to plate. . . . . 10.5 μf
Grid to heater and cathode . . . . . 6.8 μf
Plate to heater and cathode . . . . . 2.3 μf
Heater to cathode. . . . . 11.0 μf
Grid of unit No.1 to grid of unit No.2 . . . . . 0.70 μf
Plate of unit No.1 to plate of unit No.2. . . . . 1.65 μf

Characteristics, Class A1 Amplifier (Each unit):


Plate-Supply Voltage . . . . . 135 volts
Cathode-Bias Resistor . . . . . 250 ohms
Amplification Factor . . . . . 2
Plate Resistance (Approx.) . . . . . 280 ohms
Transconductance . . . . . 7000 μmhos
Plate Current. . . . . 125 ma

Mechanical:

Mounting Position. . . . . Any
Maximum Overall Length . . . . . 5-5/16"
Maximum Seated Length. . . . . 4-3/4"
Maximum Diameter . . . . . 2-1/16"
Bulb . . . . . ST-16

Base . . . . . Medium-Shell Octal 8-Pin (JETEC No. B8-11)
Basing Designation for BOTTOM VIEW . . . . . 8BD

Pin 1 - Grid of Unit No.2
Pin 2 - Plate of Unit No.2
Pin 3 - Cathode of Unit No.2
Pin 4 - Grid of Unit No.1
Pin 5 - Plate of Unit No.1
Pin 6 - Cathode of Unit No.1
Pin 7 - Heater
Pin 8 - Heater



DC AMPLIFIER

Values are for Each Unit

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE. . . . . 250 max. volts
PLATE CURRENT. . . . . 125 max. ma
PLATE DISSIPATION. . . . . 13 max. watts
PEAK HEATER-CATHODE VOLTAGE:
Heater negative with respect to cathode. 300 max. volts
Heater positive with respect to cathode. 300 max. volts

° without external shield.
■ Operation with fixed bias is not recommended.

← Indicates a change.

MAY 1, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA

6AS7-G



6AS7-G

### LOW-MU TWIN POWER TRIODE

**Maximum Circuit Values (For maximum rated conditions):**

Grid-Circuit Resistance:  
 For cathode-bias operation . . . . . 1.0 max. megohm  
 For fixed-bias operation . . . . . Not recommended

**BOOSTER SCANNING SERVICE**

*Values are for Each Unit*

**Maximum Ratings, Design-Center Values:**

*For operation in a 525-line, 30-frame system<sup>□</sup>*

PEAK NEGATIVE-PULSE PLATE VOLTAGE<sup>•</sup> . . . . 1700 max. volts  
 DC PLATE CURRENT . . . . . 125 max. ma  
 PLATE DISSIPATION. . . . . 13 max. watts  
 PEAK HEATER-CATHODE VOLTAGE:  
 Heater negative with respect to cathode . 300 max. volts  
 Heater positive with respect to cathode . 300 max. volts

**Maximum Circuit Values (For maximum rated conditions):**

Grid-Circuit Resistance:  
 For cathode-bias operation . . . . . 1.0 max. megohm  
 For fixed-bias operation . . . . . Not recommended

<sup>□</sup> As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.


<sup>•</sup> The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.



6AS7-G

AVERAGE PLATE CHARACTERISTICS  
EACH TRIODE UNIT

6AS7-G

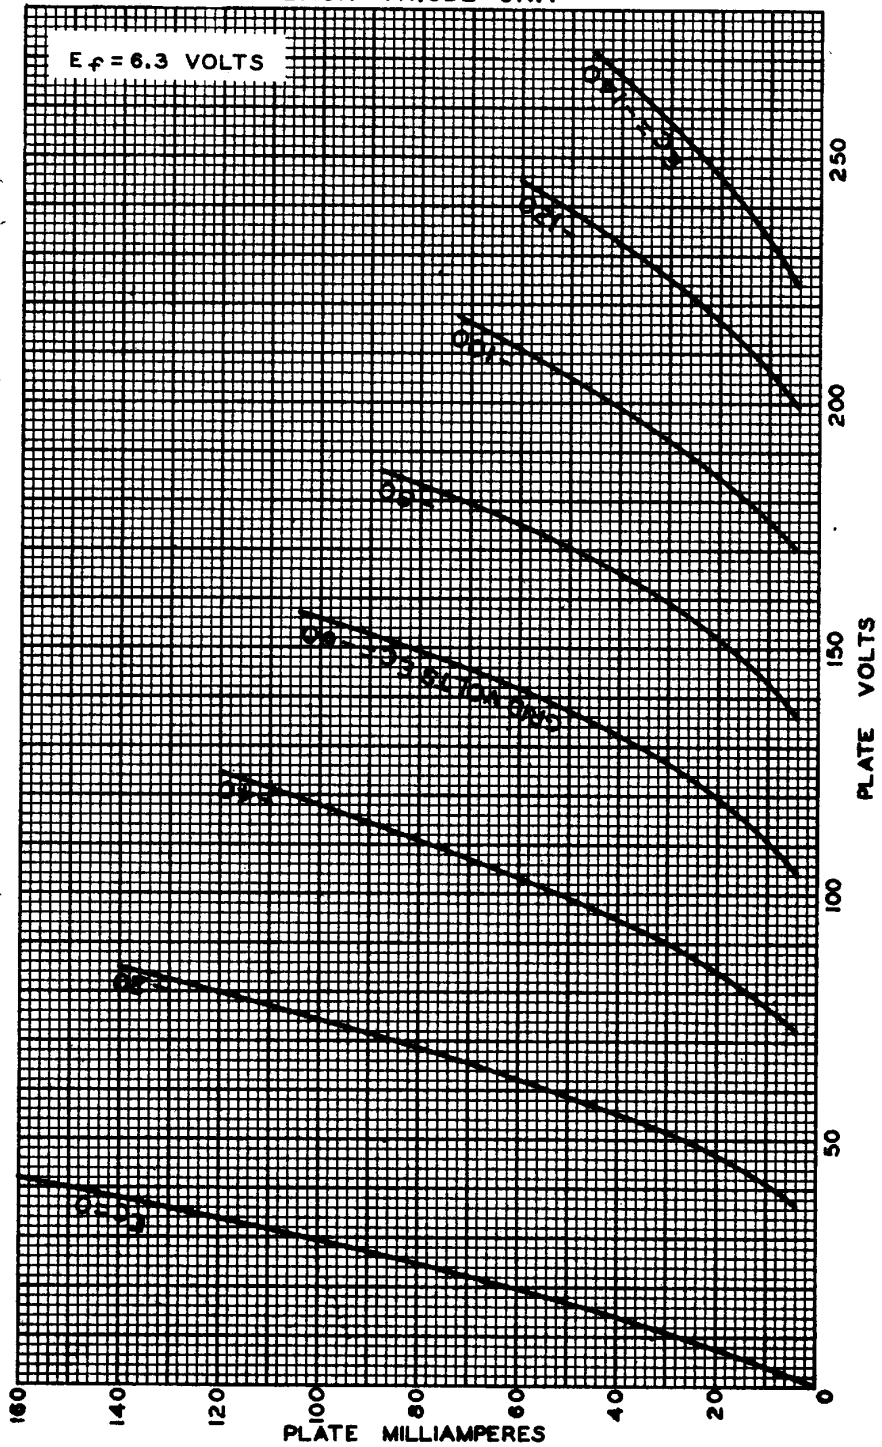

NOV. 8, 1945

RCA VICTOR DIVISION  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6618