



6B8



DUPLEX-DIODE PENTODE

Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Direct Interelectrode Capacitances: ^o		
<i>Pentode Unit:</i>		
Grid to Plate	0.005 max.	μf
Input	6	μf
Output	9	μf
Maximum Overall Length		3-1/8"
Maximum Seated Height		2-9/16"
Maximum Diameter		1-5/16"
Bulb		Metal Shell, MT-8
Cap		Miniature
Base		Small Wafer Octal 8-Pin
Pin 1 - Shell		Pin 6 - Screen
Pin 2 - Heater		Pin 7 - Heater
Pin 3 - Plate		Pin 8 - Cathode
Pin 4 - Diode Plate #2		Cap - Grid
Pin 5 - Diode Plate #1		
Mounting Position		Any

BOTTOM VIEW (8E)

PENTODE UNIT

Plate Voltage	300 max.	volts
Screen Voltage	125 max.	volts
Screen Supply Voltage	300 max.	volts
Grid Voltage	0 min.	volts
Plate Dissipation	2.25 max.	watts
Screen Dissipation	0.3 max.	watt
<i>Typical Operation and Characteristics - Class A₁ Amplifier:</i>		
Plate	250	volts
Screen	125	volts
Grid	-3	volts
Plate Res.	0.6 approx.	megohm
Transcond.	1325	μmhos
Grid Bias for cathode-current cut-off	-21 approx.	volts
Plate Cur.	10	ma.
Screen Cur.	2.3	ma.

DIODE UNITS - Two

Consideration of these units is given under Type 6B8-G. Circuits will be similar to those shown for Type 2B7.

- In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- With shell connected to cathode.

For Diode Curves, see Type 6B7. For additional data, see RESISTANCE-COUPLED AMPLIFIER CHART.

← Indicates a change.

Sept. 2, 1941

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


DATA

6B8



6B8

AVERAGE PLATE CHARACTERISTICS

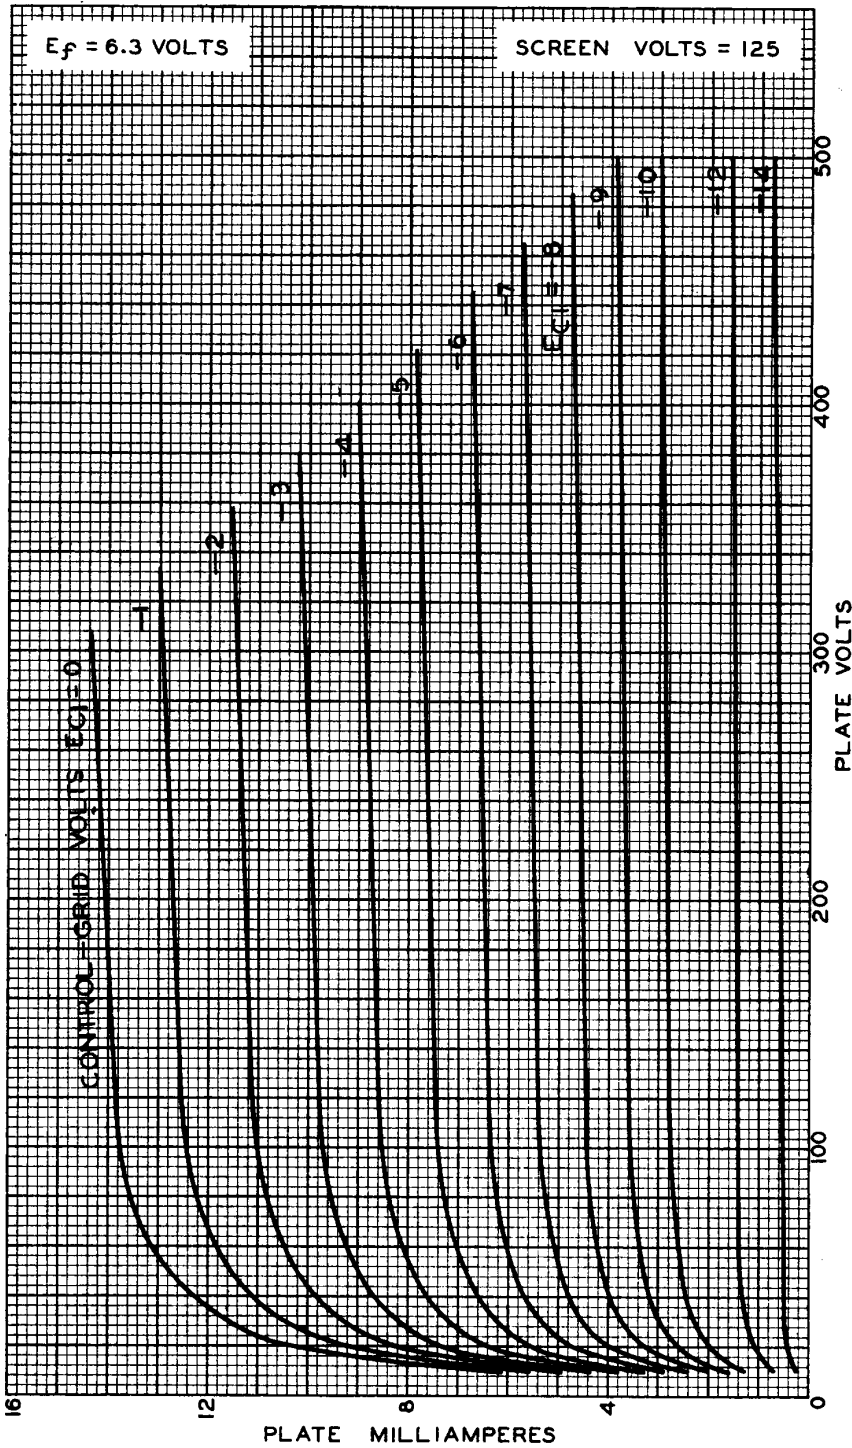

AUG. 14, 1936

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4657