


RELIABLE MINIATURE DOUBLE TRIODE

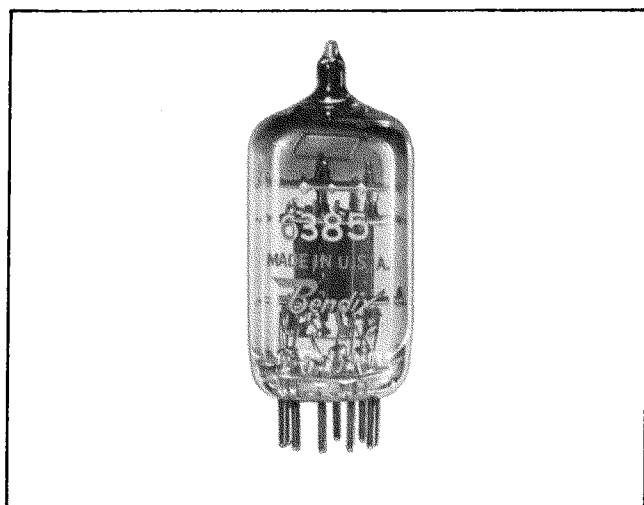

DESCRIPTION

This miniature nine-pin double triode is one of the Bendix Red Bank line of reliable vacuum tubes specifically designed for aircraft and industrial applications where freedom from early failure, long average service life, and uniform operating characteristics are extremely important. It is intended to replace the 2C51 or the 5670 in applications where reliability is the primary consideration. Each tube is given a 45-hour run-in under various overload, vibration, and shock conditions likely to be encountered in service. This run-in serves to reduce early failures by eliminating tubes with any minor defects that might lead to failure under actual operating conditions.

The use of a coil type heater inside an extruded alumina insulator gives a long life heater structure which stands up well under high heater to cathode voltage. The mount structure is so designed that the tube is capable of withstanding severe shock and vibration.

The tube is intended for use as an amplifier—to increase or control alternating voltages or power; as a mixer—to change electrical energy at one frequency to electrical energy at another frequency; or as an oscillator—to generate an alternating voltage. It can also be used in control equipment as part of a multivibrator or clamp circuit. When used as an oscillator, the upper limit of its frequency range is approximately 500 Mc.

This tube has been designed to minimize noise and microphonic effects.

RATINGS*

| | |
|-------------------------------------|--------------------------|
| Heater voltage—(AC or DC)** | 6.3 volts |
| Heater current | 0.50 amps |
| Plate voltage—(max.) | 300 volts |
| Max. peak plate current (per plate) | 25 mA |
| Max. plate dissipation (per plate) | 1.5 watts |
| Max. peak grid voltage | { +0 volts -100 volts |
| Max. heater-cathode voltage | 300 volts |
| Max. grid resistance | 1.0 megohm |
| Warm-up time | 25 sec. |
| Life expectancy*** | 10,000 hrs. |

(Plate and heater voltage may be applied simultaneously)

*To obtain greatest life expectancy from tube, avoid designs where the tube is subject to all maximum ratings simultaneously.

** Voltage should not fluctuate more than $\pm 5\%$.

*** See application notes.

PHYSICAL CHARACTERISTICS

| | |
|---------------------|------------------------|
| Base | Miniature button 9-pin |
| Bulb | T-6½ |
| Max. overall length | 2¾ in. |
| Max. seated height | 1½ in. |
| Max. diameter | ⅞ in. |
| Mounting position | Any |
| Max. bulb temp. | 160°C |
| Max. altitude**** | 80,000 ft. |

**** See Altitude Rating Chart on page 3.

AVERAGE

ELECTRICAL CHARACTERISTICS

| | |
|------------------------------------------------|-------------------|
| Heater voltage, E_f | 6.3 volts |
| Heater current, I_f | 0.50 amps. |
| Plate voltage, E_b | 150 volts |
| Grid voltage, E_c | -2.0 volts |
| Plate current, I_b | 8.0 mA |
| Mutual conductance, g_m | 5000 μ mhos |
| Amplification factor, μ | 35 |
| Cut-off voltage | -10 volts |
| Direct interelectrode capacitances (no shield) | |
| Plate-grid (per section) | 1.7 μ μ f |
| Plate-cathode (per section) | 1.1 μ μ f |
| Grid-cathode (per section) | 2.4 μ μ f |
| Plate-plate | 0.1 μ μ f |

THE *Bendix* CORPORATION

Red Bank DIVISION, EATONTOWN, NEW JERSEY

ELECTRICAL CHARACTERISTICS AND TEST DATA

TEST CONDITIONS AND CHARACTERISTIC LIMITS



All Tubes are Stabilized for 45 Hours Under Test Conditions and
 2 G. Vibration at 30 cps Prior to 100% Testing

| CHARACTERISTIC | SYMBOL | MIN | DESIGN CENTER | MAX. | UNITS |
|---------------------------------------------------------------------|-----------|---------|---------------|-----------|-------|
| PRODUCTION ON TESTS | | | | | |
| Heater Current | If | 460 | 500 | 540 | mA |
| Heater-Cathode Leakage | Ihk | — | — | ± 10 | μAdc |
| Grid Current | Ic | — | — | — 0.3 | μAdc |
| Plate Current | Ib | 5.5 | 8.0 | 11.5 | mAdc |
| Transconductance | Sm | 4000 | 5000 | 6500 | μmhos |
| Trans. Ef = 5.7 v. | Sm | — | — | 15% | |
| Cut Off Plate Current (Ecl = — 10 v. D.C.) | Ib | — | — | 45 | uAdc |
| DESIGN TESTS | | | | | |
| Short and Continuity | | | | | |
| Noise and Microphonics | | | | | |
| Ehk = 0 Ebb = 250 Ecl = 0 Ecal = 200 mVac Rp = 10,000 V | Ep | | | 200 | mVac |
| R. F. Noise | | | | | |
| | | | | 3.0 | mWac |
| Electrode Insulation | | | | | |
| Eg-all = — 100 V Ep-all = — 300 V | | 500 | — | — | Meg |
| Vibration 30 cps 2.5 g. | | | | | |
| Ecl = — 3 v. D.C. Rp = 2000 ohms Eb = 150 v. D.C. | Ep | — | — | 100 | mVac |
| Grid Emission Test Ef = 7.0 v. | | | | | |
| Time = 5 minutes @ Ef = 7.5 V. | Ic | | | — 0.5 | μAdc |
| | Cgp | 1.4 | 1.7 | 2.0 | μμfds |
| Capacitance | | | | | |
| | Cin | 1.9 | 2.4 | 2.9 | μμfds |
| | Cout | 0.8 | 1.1 | 1.4 | μμfds |
| | Cpp | — | — | 0.15 | μμfds |
| ELECTRODE: | Ef | Eb | Ec | Ehk | |
| TEST CONDITIONS: | 6.3 Volts | 150 Vdc | — 2.0 Vdc | ± 250 Vdc | |


SPECIAL TESTS

In addition to the production and design tests shown in Chart 3 other tests are performed on a sampling basis to assure a high outgoing quality level. See below.

| TEST | CONDITIONS | DURATION |
|--------------------------|----------------------------------------------------------------|---------------------|
| Heater Cycling Life Test | On 2½ Min. Off 2½ Min. Ef = 7.5 Ehk = 250 | 3,000 On-Off Cycles |
| Life Test | Under "Test Conditions" | 1,000 Hours |
| Life "Expectancy" Test | Under "Test Conditions" | 10,000 Hours |
| High Level Fatigue Test | 50G—Shock Excitation 18/sec. rep. rate | 100 Hours |
| Shock | 500 g. | 20 Impacts |
| Altitude Test | 60,000 Feet | 5 Minutes |
| Glass Strain Test | Boiling Water to Ice Water | 15 Seconds in Each |
| Mount Inspection | 100% Test—Microscopic Inspection of 30 Possible Trouble Points | |

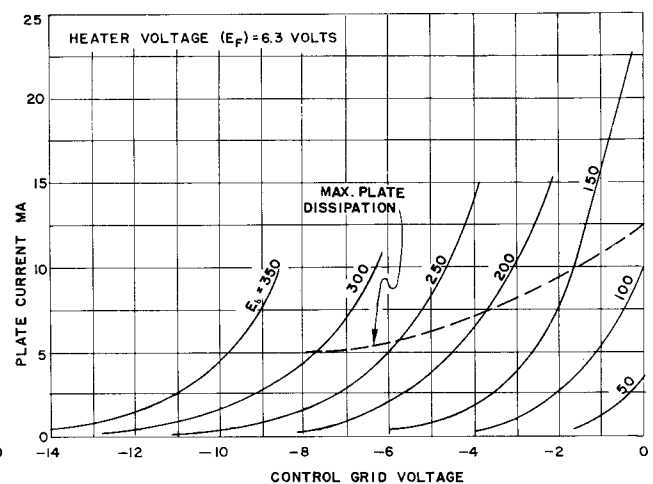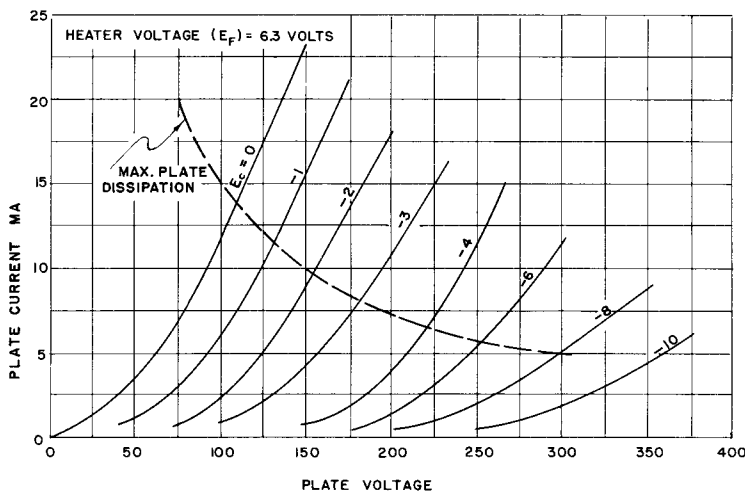

ALTITUDE RATINGS

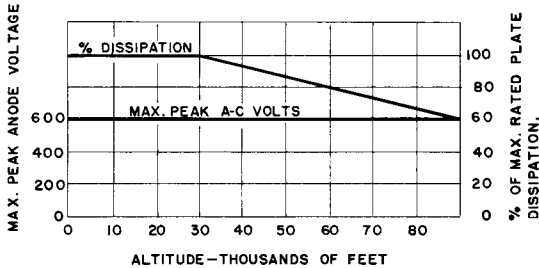

THIS CHART IS INCLUDED AS AN ILLUSTRATION OF THE AMOUNT OF DISSIPATION DERATING NECESSARY IN A SPECIFIC APPLICATION TO AVOID EXCEEDING THE MAXIMUM BULB TEMPERATURE. EACH APPLICATION SHOULD BE CHECKED TO DETERMINE THAT THE MAXIMUM BULB TEMPERATURE IS NOT EXCEEDED. EITHER DERATING OR COOLING OR BOTH MAY BE NECESSARY

CRITERIA FOR DERATING FOLLOWS:

1. VOLTAGE DERATING—TO KEEP BELOW BASE PIN ARC OVER POINT.
2. DISSIPATION DERATING—TO KEEP BULB TEMPERATURE BELOW MAXIMUM RATING.

APPLICATION NOTES


Special attention should be given to the temperatures at which the tubes are to be operated. Reliability will be seriously impaired if maximum bulb temperature is exceeded. The life expectancy will be reduced if conditions other than those specified for life test are imposed on the tube and will be reduced appreciably if absolute maximum ratings are exceeded. Both reliability and performance will be jeopardized if filament voltage ratings are exceeded. Life and reliability of performance are directly related to the degree that regulation of the heater voltage is maintained at its center rated value.

The altitude rating chart shows the correct voltage derating necessary for various altitudes. However, the dissipation derating is only approximate and must be measured for each application because of the additive effects mentioned above.


The increased rating chart is presented to emphasize the dangers of operating simultaneously at or near all maxima. In general, the effect on the life of operation at increased ratings is additive and cumulative. Interpolation within this chart will give the designer a general idea of the life expectancy and reliability of his application. Each proposed application should be life tested under maximum environmental conditions in order to check that the design gives the desired reliability. When conservatively used this tube has a life expectancy of 10,000 hours.

EFFECT ON LIFE OF INCREASED RATINGS

| RATING OR CHARACTERISTIC | OPERATING CONDITIONS | | |
|--------------------------|----------------------|--------------|----------------|
| | CONSERVATIVE | TYPICAL | MAXIMUM |
| Heater Voltage | 6.3 ± 2% | 6.3 ± 5% | 6.3 ± 10% |
| Plate Voltage | 130 Vdc | 150 Vdc | 180 Vdc |
| Peak Plate Voltage | 200 V | 250 V | 300 V |
| Plate Current (Av.) | 6 mA | 7 mA | 8 mA |
| Cathode Current (Peak) | 15 mA | 20 mA | 25 mA |
| H-K Voltage | 200 V | 250 V | 300 V |
| Grid Resistance | 250,000 ohms | 750,000 ohms | 1,000,000 ohms |
| Bulb Temperature | 120°C | 140°C | 160°C |
| Altitude | 0-20,000 ft | 60,000 ft | 80,000 ft |
| Vibration | 1 G | 2½ G | 5 G |
| LIFE EXPECTANCY | MAXIMUM | HIGH | MEDIUM |

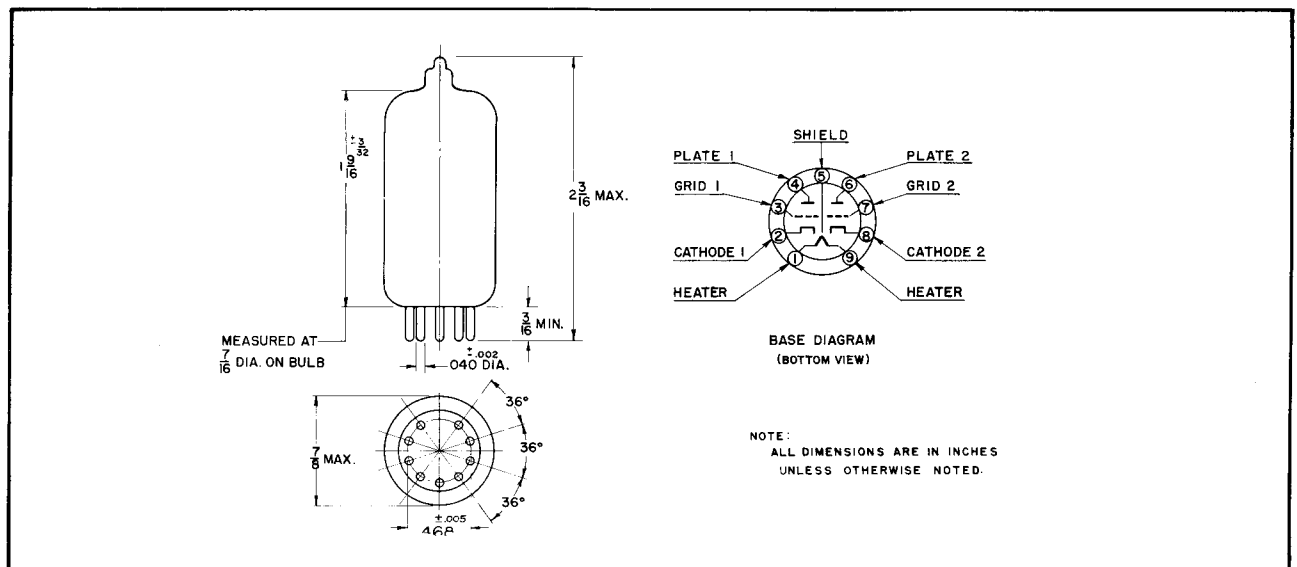

OUTLINE DRAWING

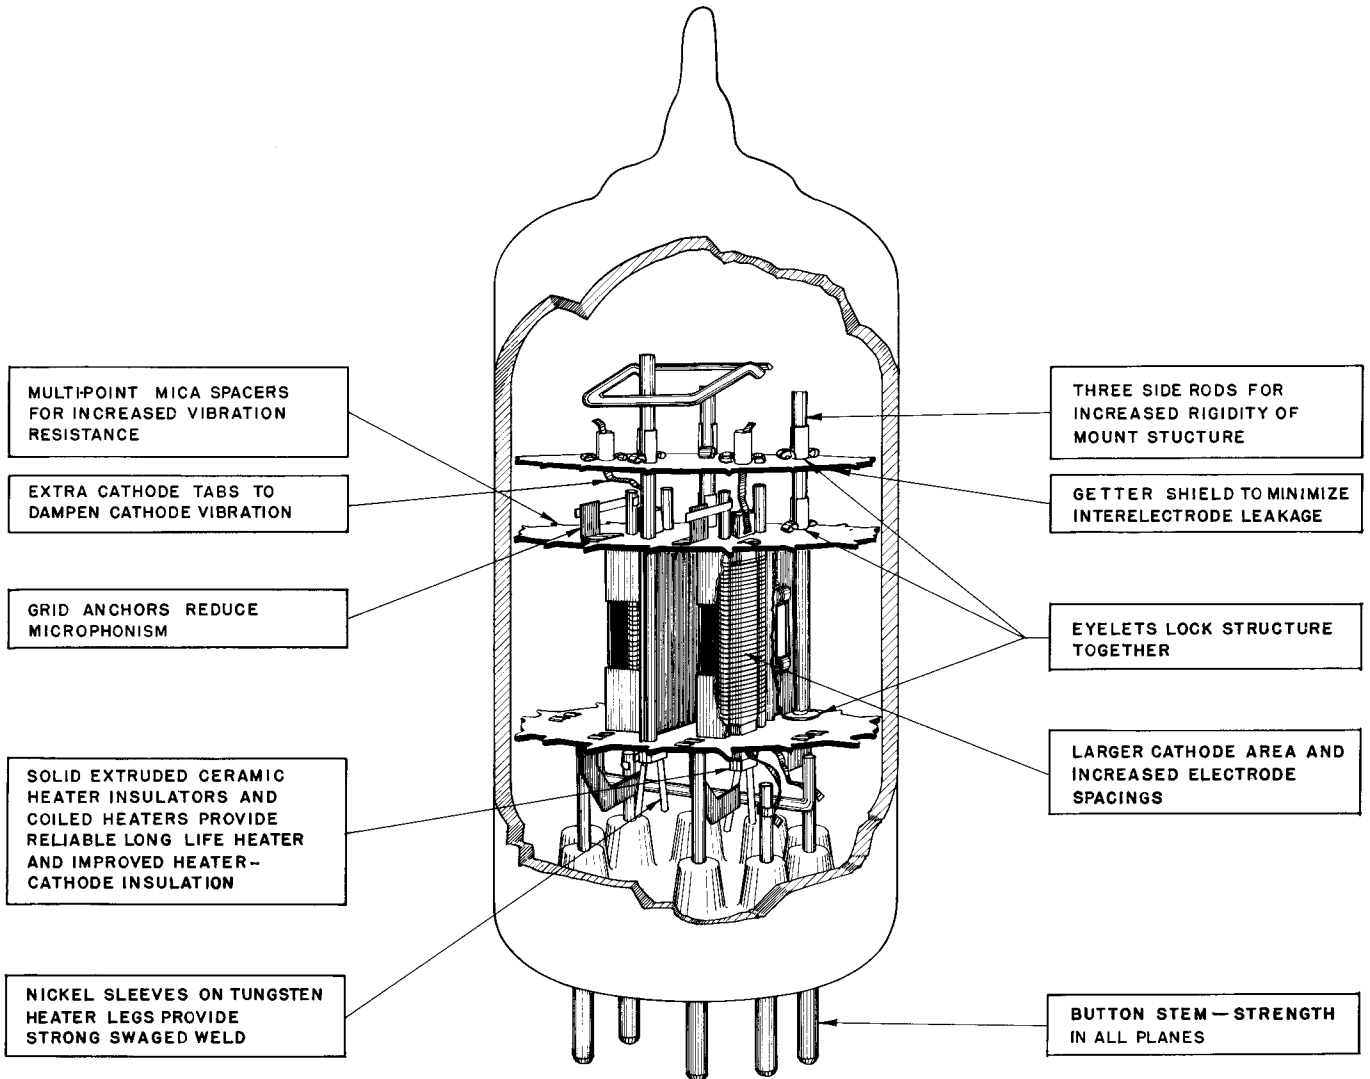

STRUCTURAL FEATURES OF 6385 PROVIDE HIGH RELIABILITY AND LONG LIFE.

THE **Bendix** CORPORATION

Red Bank DIVISION, EATONTOWN, NEW JERSEY

West Coast Sales & Service: 117 E. Providencia Ave., Burbank, Calif.

Export Sales & Service: Bendix International Division,
205 E. 42nd St., New York 17, N.Y.

Canadian Distributor: Computing Devices of Canada, Ltd., P.O. Box 508,
Ottawa 4, Ontario