



6BZ6

SEMIREMOTE-CUTOFF PENTODE

7-PIN MINIATURE TYPE

6BZ6

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3 ± 10%	volts
Current	0.3	amp

Direct Interelectrode Capacitances:

	<i>Without External Shield</i>	<i>With External Shield^o</i>	
Grid No.1 to plate.	0.025 max.	0.015 max.	μf
Grid No.1 to cathode, grid No.3 & internal shield, grid No.2, and heater	7	7	μf
Plate to cathode, grid No.3 & internal shield, grid No.2, and heater.	2	3	μf


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	125	volts
Grid No.3	<i>Connected to cathode at socket</i>	
Grid-No.2 Supply Voltage.	125	volts
Cathode Resistor.	56	ohms
Plate Resistance (Approx.).	0.26	megohm
Transconductance.	8000	μmhos
Plate Current	14	ma
Grid-No.2 Current	3.6	ma
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 50.	-19	volts
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 700 and cathode resistor (ohms) = 0	-4.5	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/2" ± 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	<i>See General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CM

- Pin 1 - Grid No.1
- Pin 2 - Cathode
- Pin 3 - Heater
- Pin 4 - Heater
- Pin 5 - Plate



- Pin 6 - Grid No.2
- Pin 7 - Grid No.3,
Internal
Shield

← Indicates a change.

6BZ6



6BZ6

SEMIREMOTE-CUTOFF PENTODE

AMPLIFIER — Class A₁

→ Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	330 max.	volts
GRID-No.3 (SUPPRESSOR-GRID) VOLTAGE	0 max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE.	330 max.	volts
GRID-No.2 VOLTAGE	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Positive-bias value	0 max.	volts
GRID-No.2 INPUT:		
For grid-No.2 voltages up to		
165 volts	0.55 max.	watt
For grid-No.2 voltages between 165		
and 330 volts	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
PLATE DISSIPATION	2.3 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with		
respect to cathode.	200 max.	volts
Heater positive with		
respect to cathode.	200 [▲] max.	volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:		
For fixed-bias operation.	0.25 max.	megohm
For cathode-bias operation.	1 max.	megohm

⁰ With external shield JEDEC No.316 connected to cathode.

[▲] The dc component must not exceed 100 volts.


→ Indicates a change.



6BZ6

6BZ6

AVERAGE CHARACTERISTICS

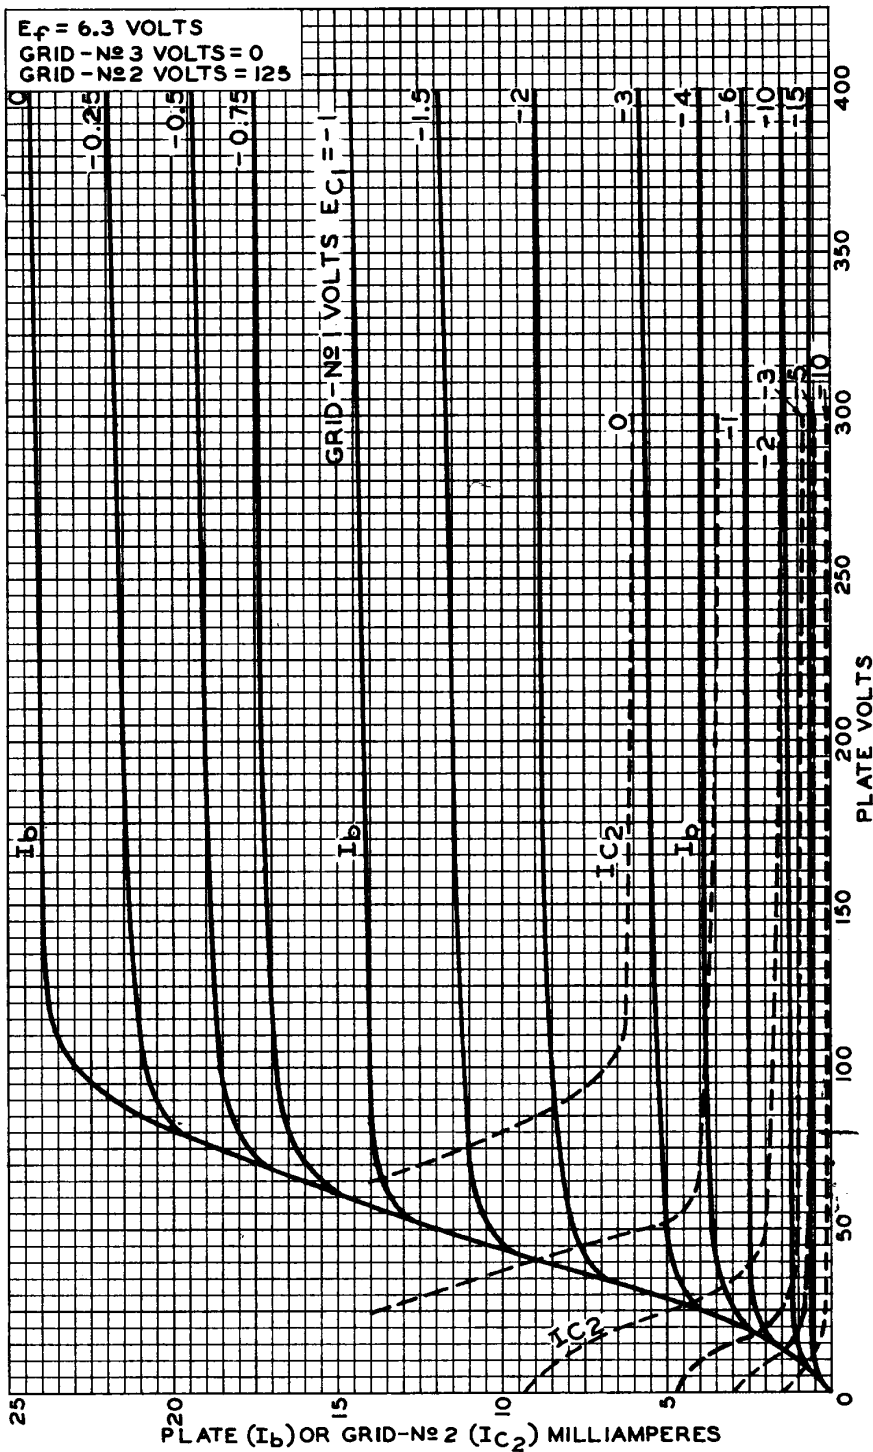

ELECTRON TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-8508R2

6BZ6



6BZ6

AVERAGE CHARACTERISTICS

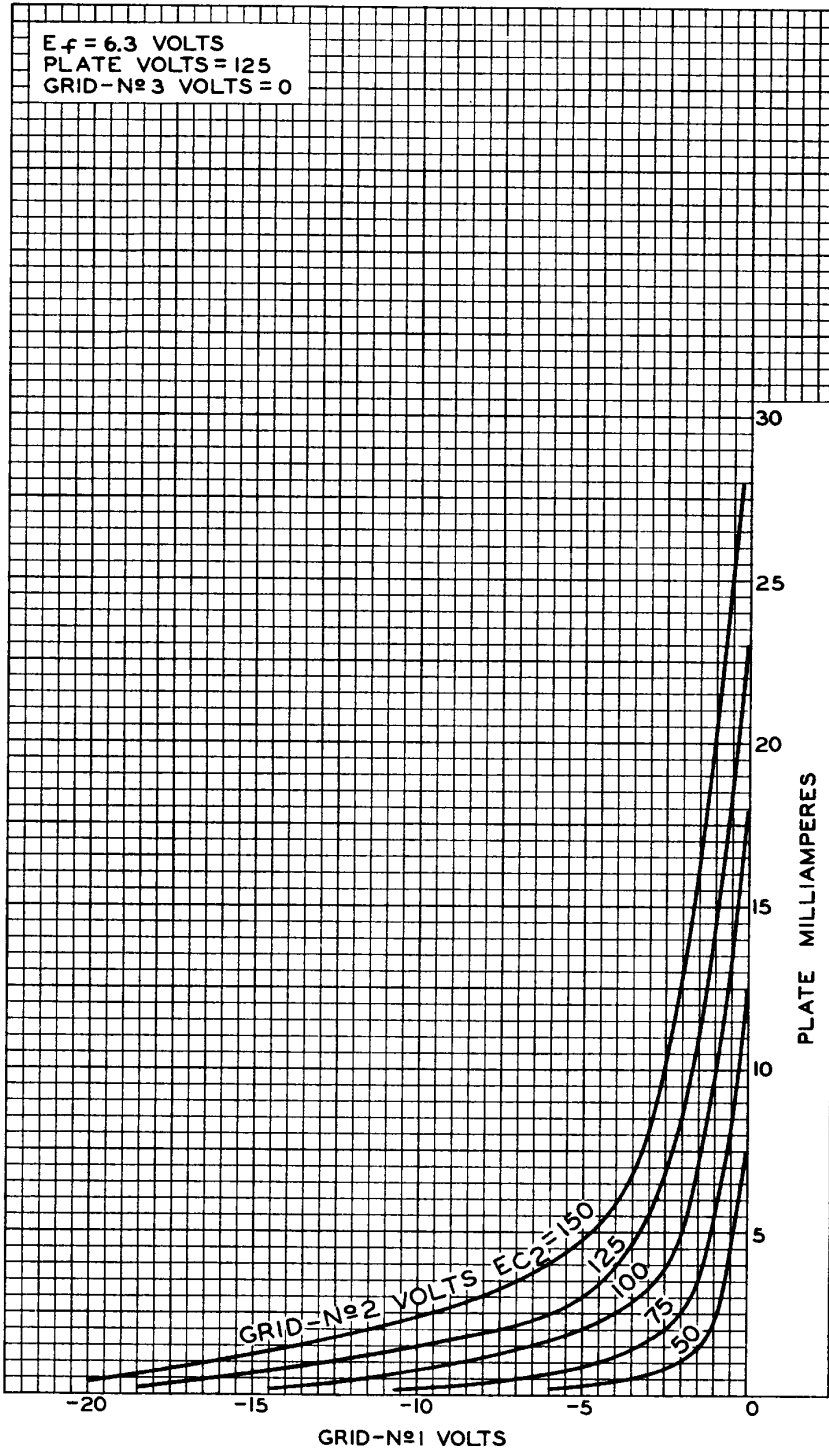




6BZ6

6BZ6

AVERAGE CHARACTERISTICS

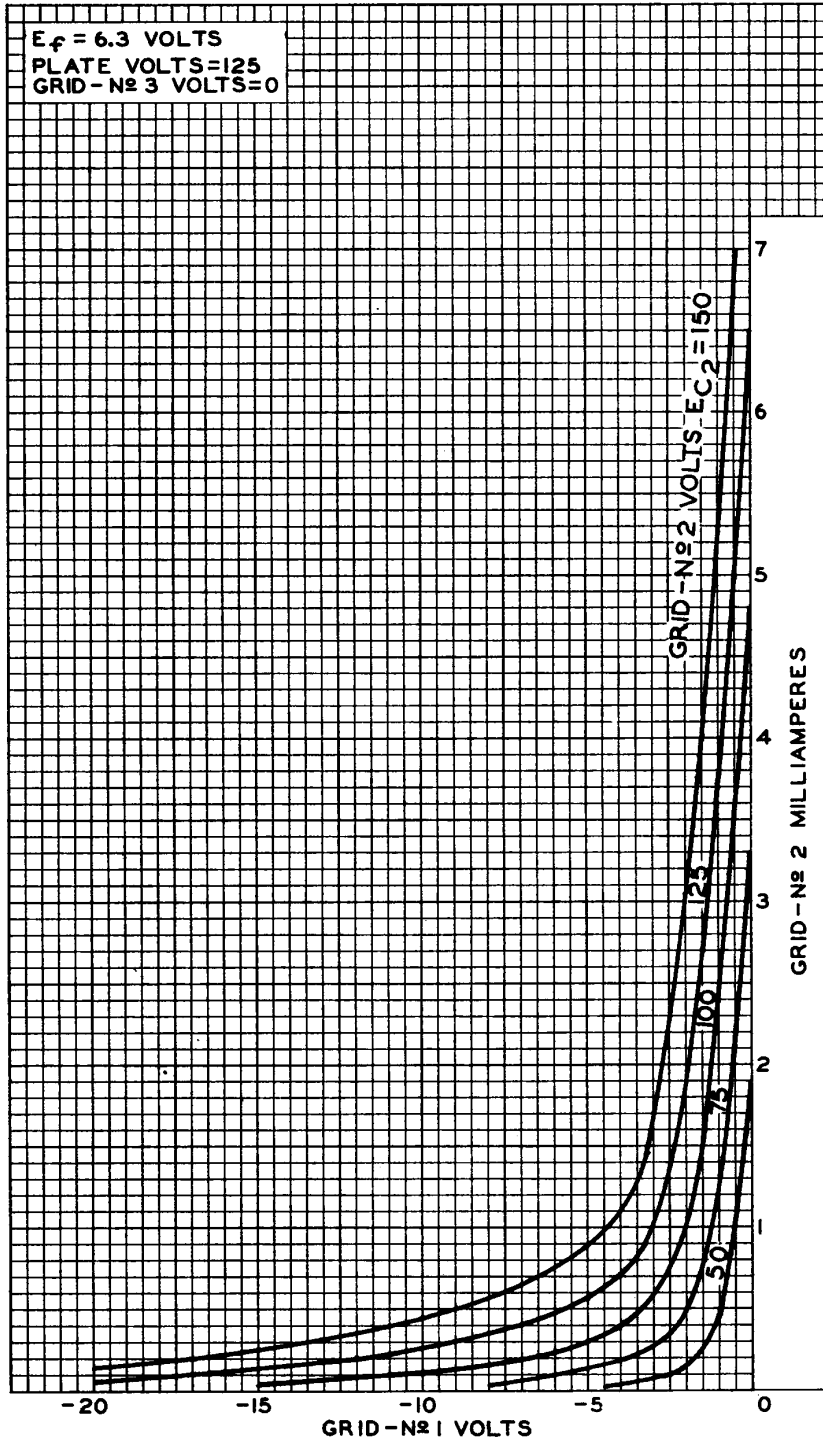

6BZ6



6BZ6

AVERAGE CHARACTERISTICS

